


PRODUCT DATA SHEET

MW125FRS

FIRE RATED SUPPLY VALVE

W RAL9010

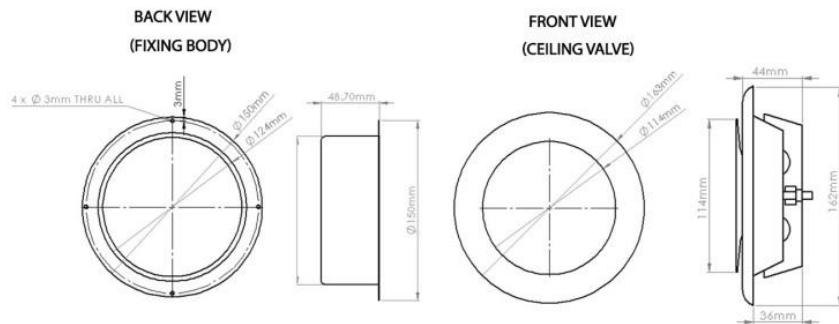

SPECIFICATION DETAILS

The MW125FRS 125mm diameter Round Fire Rated Supply Valve is manufactured from White Epoxy Powder Coated Steel. The valve has a male spigot to fit inside the System 125 duct.

The MW125FRS Supply Air Valve is fully adjustable and has a locking nut to fix the position of the control disc upon commissioning. It is supplied complete with a fixing body with pre-drilled holes for installation.


The MW125FRS incorporates an integral intumescent material and has been fire tested to BS EN 1365-2: 1999 with 60 minute rating for ceilings.

MW125FRS has been designed for use with Verplas System 125 Round.

Manufacturer:	Verplas Ltd
Part Number:	MW125FRS
Size:	125mm Diameter
For use with:	Verplas System 125
Box quantity:	7
Individual Weight:	334g
Colour:	White

MAX/MIN OPERATING TEMPERATURES	+ 60°C to - 15°C
---------------------------------------	------------------

PERFORMANCE CURVE

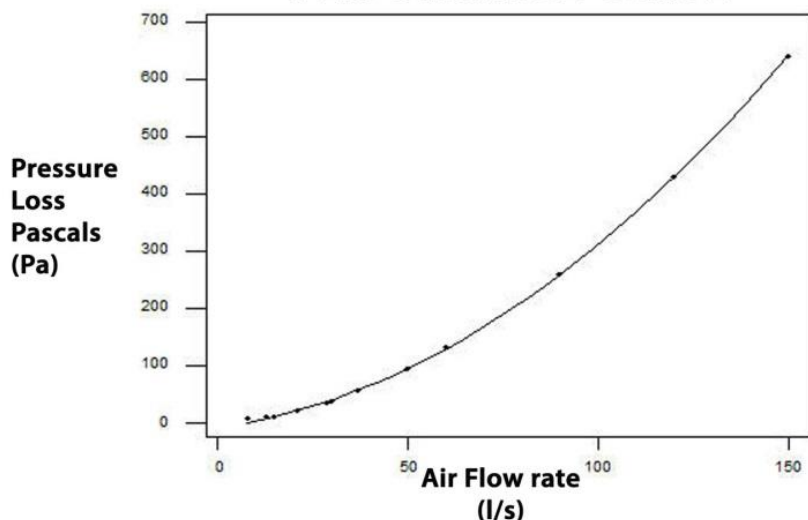

*Pressure losses with Control Disk 10mm open

AIRFLOW	RESISTANCE
8 l/s	6.00 pa
13 l/s	9.50 pa
21 l/s	19.50 pa
30 l/s	36.42 pa
60 l/s	132.00 pa
120 l/s	430.00 pa

Associated Ancillaries

