

# XIMX

Inline mixed flow extract fans for domestic ducted applications



Available in four sizes, the Xpelair XIMX range of plastic mixed flow inline units offers duties for a wide range of ducted applications. The timer models have an adjustable overrun timer of 2 – 30 minutes. All models come complete with a convenient mounting cradle which makes installation or subsequent inspection simple. Plus, the terminal box is easily accessible, simplifying the electrical connection.




| Product Selector                        | XIMX100 | XIMX100T    | XIMX100+ | XIMX100+T   | XIMX125 | XIMX150 | XIMX150T    | XIMX200  |
|---|---------|-------------|----------|-------------|---------|---------|-------------|----------|
| Reference Number                        | 93078AW | 93079AW     | 93080AW  | 93081AW     | 93082AW | 93083AW | 93084AW     | 93085AW  |
| Speeds                                  | 2       | 2           | 2        | 2           | 2       | 2       | 2           | 2        |
| Extract Performance (m <sup>3</sup> /h) | 187/145 | 187/145     | 245/180  | 245/180     | 280/220 | 520/405 | 520/405     | 1040/830 |
| Extract Performance (l/s)               | 52/40   | 52/40       | 68/50    | 68/50       | 78/61   | 144/113 | 144/133     | 289/231  |
| Sound Pressure (dBA@3m)                 | 36/27   | 36/27       | 32/27    | 32/27       | 37/28   | 44/33   | 44/33       | 52/45    |
| Adjustable Timer                        |         | 2 – 30 mins |          | 2 – 30 mins |         |         | 2 – 30 mins |          |
| Duct Size (mm)                          | 100     | 100         | 100      | 100         | 125     | 150     | 150         | 200      |
| IP Rating                               | IPX4    | IPX4        | IPX4     | IPX4        | IPX4    | IPX4    | IPX4        | IPX4     |

**XIMX100/100+125 Range**

**XIMX150/200 Range**

| Dimensions (mm) |     |     |       |
|-----------------|-----|-----|-------|
| Model           | ØA  | B   | C     |
| XIMX100         | 96  | 190 | 246   |
| XIMX100T        | 96  | 190 | 246   |
| XIMX100+        | 97  | 226 | 302.5 |
| XIMX100+T       | 97  | 226 | 302.5 |
| XIMX125         | 123 | 190 | 246   |
| XIMX150         | 146 | 250 | 295   |
| XIMX150T        | 146 | 250 | 295   |
| XIMX200         | 199 | 261 | 295.5 |

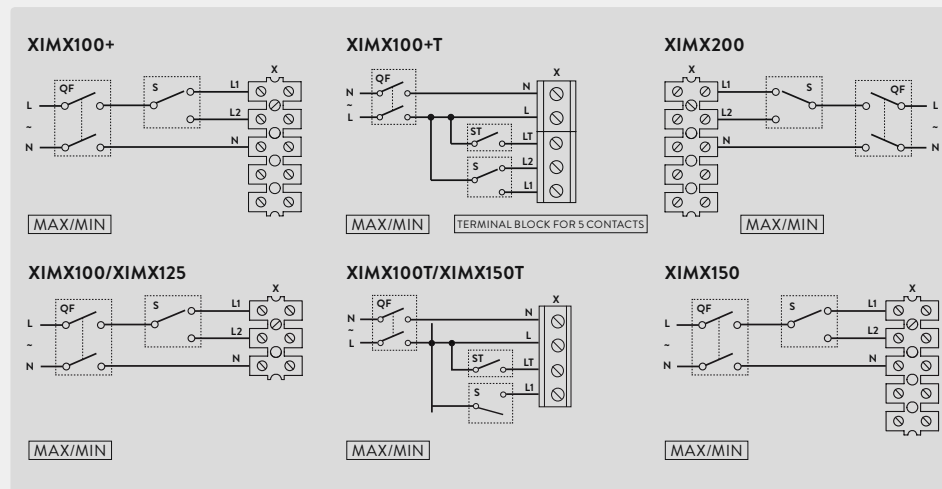

| Product Features              | XIMX100 | XIMX100T | XIMX100+ | XIMX100+T | XIMX125 | XIMX150 | XIMX150T | XIMX200 |
|-------------------------------|---------|----------|----------|-----------|---------|---------|----------|---------|
| Reference Number              | 93078AW | 93079AW  | 93080AW  | 93081AW   | 93082AW | 93083AW | 93084AW  | 93085AW |
| Trade Price                   | £72.20  | £92.20   | £145.30  | £166.90   | £166.90 | £186.61 | £205.51  | £250.78 |
| Standard                      | ✓       |          | ✓        |           | ✓       | ✓       |          | ✓       |
| Timer (adjustable 2 – 30mins) |         | ✓        |          | ✓         |         |         | ✓        |         |
| Integral Mounting Cradle      | ✓       | ✓        | ✓        | ✓         | ✓       | ✓       | ✓        | ✓       |



BPC Ventilation Ltd  
 8 Redlands Road  
 Larne  
 BT40 1AX  
 T: 028 2827 5150  
 E: info@bpcventilation.com  
 W: www.bpcventilation.com